

ZYH-4XA系列三相四线高插入损耗EMI电源滤波器

ZYH-4XA series three phases three wires high insertion loss EMI filter

ZYH-4XA系列 : ZYH-4XA Series



ZYH-4XA系列 : ZYH-4XA Series

特点和应用: Features and Applications

应用于380/ 440Vac三相四线连接的各类电源电子设备

Apply in various electronical equipments


同等功率下相对较小的体积

Relative small volume at equal power

主要可用来抑制工业电网通过电源线对设备的电磁干扰

Mainly used to suppress the EMI to the equipment in industrial power net
对线一线和线一地间干扰具有优良的抑制能力
Provide high performance of effectively suppressing EMI both in line-to-line and line-to-ground

订购信息: Ordering Information

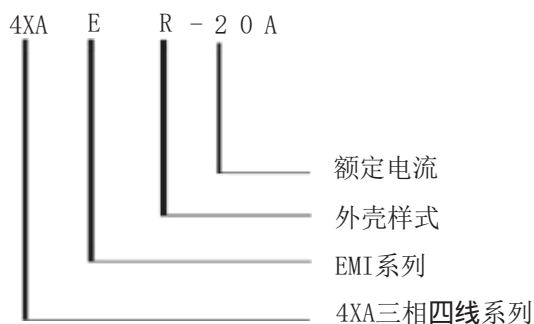

可选型号: Available Part Numbers

型号 Type ZYH-	额定电流范围 Rated Current (A)	绝缘电阻 Insulation Resistance (MΩ)	端接方式 Terminal	
			入Input	出Output
4XAES	3-20	≥ 1500		
4XAER	10-30	≥ 1500		
4XAED	20-30	≥ 1500		
4XAEY	40-50	≥ 1500		
4XAEU	50-80	≥ 1500		
4XAEJ	80-200	≥ 1500		
4XAET	200-1000	≥ 1500		

规格: Specifications

每条线路对地的最大泄漏电流:

Maximum leakage current each Line to Ground:


	4XAES	4XAER	4XAED	4XAEY
@380VAC 60Hz:	≤1.0mA	≤1.3mA	≤2.2mA	≤2.7mA
@440VAC 50 Hz:	≤1.2mA	≤1.5mA	≤2.5mA	≤3.0mA
	4XAEU	4XAEJ	4XAET	
@380VAC 60Hz:	≤3.7mA	≤6.0mA	≤7.5mA	
@440VAC 50 Hz:	≤4.0mA	≤6.5mA	≤8.0mA	

Hipot额定值 (一分钟):

Hipot rating (one minute):

线路对地:	1800VAC
Line to Ground:	
线对线:	1500VDC
Line to Line:	
工作电压:	380VAC/440VAC
Rated Voltage (max.):	
工作频率:	50/60HZ
Operating Arequency:	
额定电流:	1-1000A
Rated Current:	
气候类别:	25/085/21
Climatic Category:	

电路原理图 Electrical Schematics

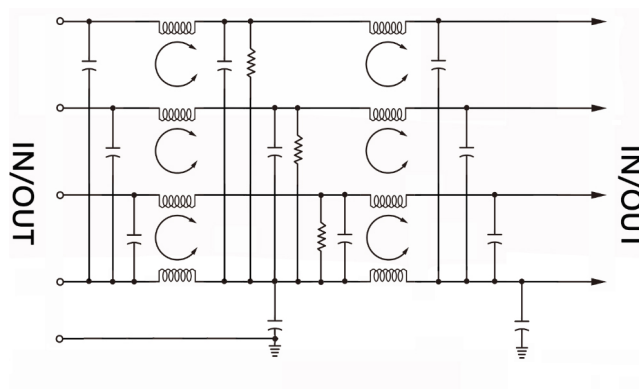


ZYH-4XA系列三相四线高插入损耗EMI电源滤波器
ZYH-4XA series three phases three wires high insertion loss EMI filter


ZYH-4XA系列 : ZYH-4XA Series

外壳样式: Case Styles


4XAES外壳样式: 4XAES Case Styles

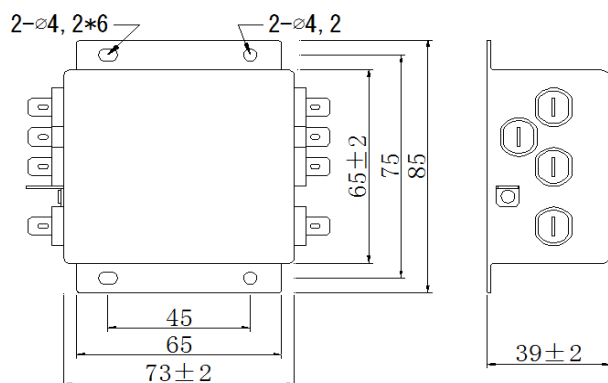


4XAER外壳样式: 4XAER Case Styles

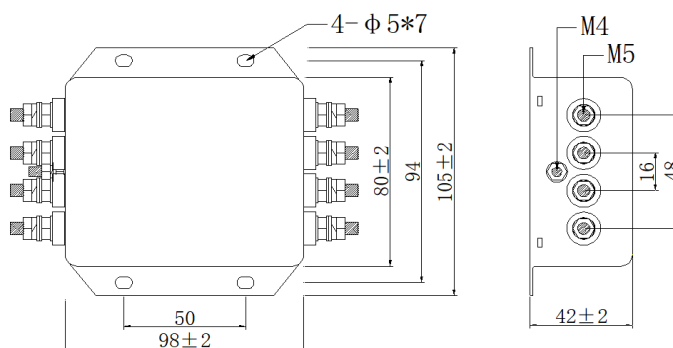

4XAED外壳样式: 4XAED Case Styles

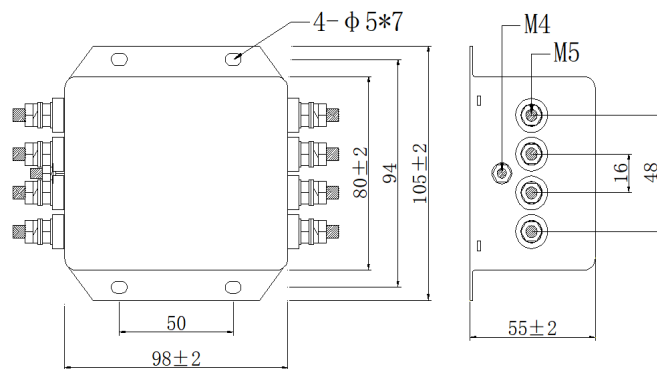

4XAEY外壳样式: 4XAEY Case Styles

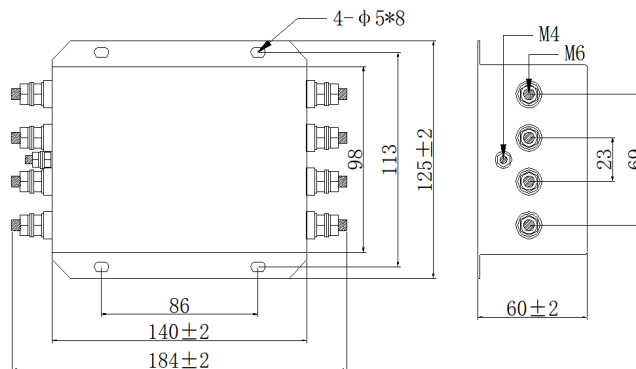


ZYH-4XA系列三相四线高插入损耗EMI电源滤波器

ZYH-4XA series three phases three wires high insertion loss EMI filter

ZYH-4XA系列 : ZYH-4XA Series


4XAEU外壳样式: 4XAEU Case Styles

样式1: Case Styles one

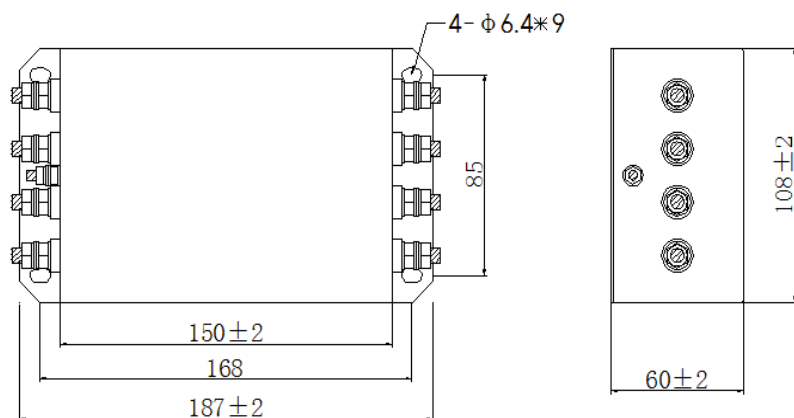


4XAEU外壳样式: 4XAEU Case Styles

样式2: Case Styles Two

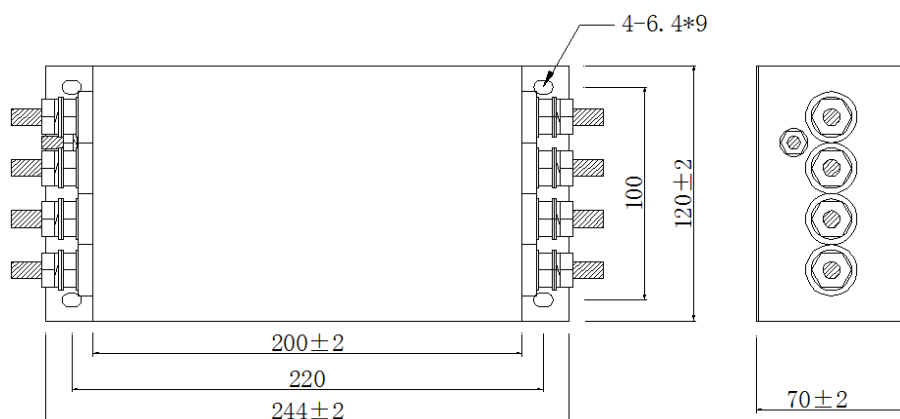

4XAEU外壳样式: 4XAEU Case Styles

样式3: Case Styles Three

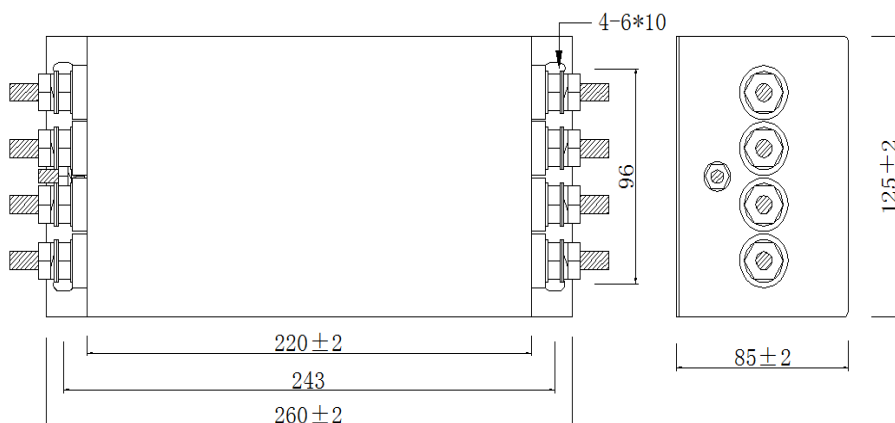


ZYH-4XA系列三相四线高插入损耗EMI电源滤波器
 ZYH-4XA series three phases three wires high insertion loss EMI filter

ZYH-4XA系列 : ZYH-4XA Series


4XAEJ外壳样式: 4XAEJ Case Styles

样式1: Case Styles one

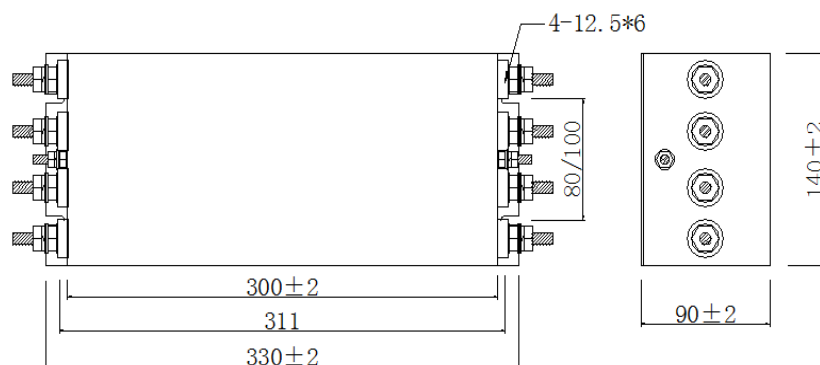


4XAEJ外壳样式: 4XAEJ Case Styles

样式2: Case Styles Two

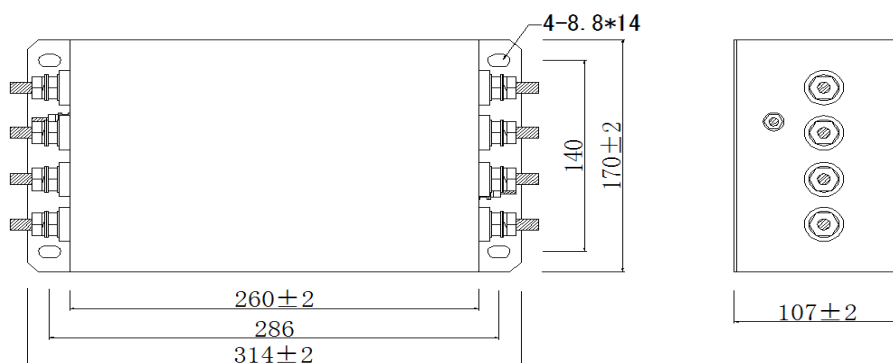

4XAET外壳样式: 4XAET Case Styles

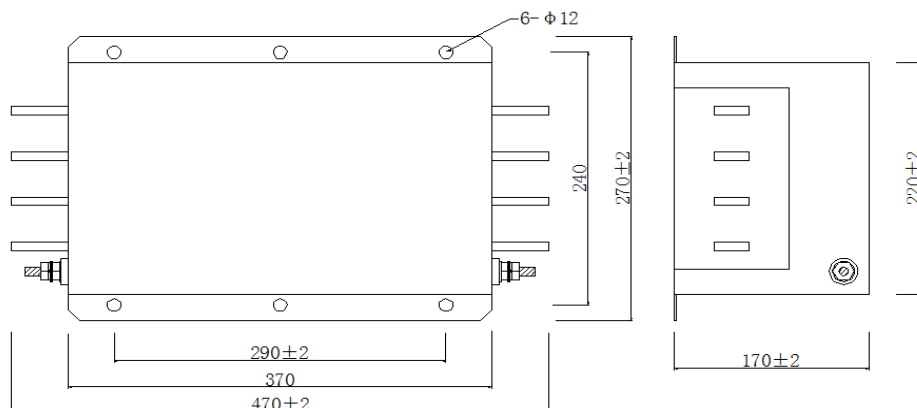

ZYH-4XA系列三相四线高插入损耗EMI电源滤波器

ZYH-4XA series three phases three wires high insertion loss EMI filter

ZYH-4XA系列 : ZYH-4XA Series

性能参数

Performance Data







典型插入损耗

typical Insertion Loss

在封闭的50欧姆系统中测量

Measured in closed 50 Ohm system

 共模/不对称 (L-G)
 Common Mode / Asymmetrical (L-G)
 差模/对称 (L-L)
 Differential Mode / Symmetrical (L-L)

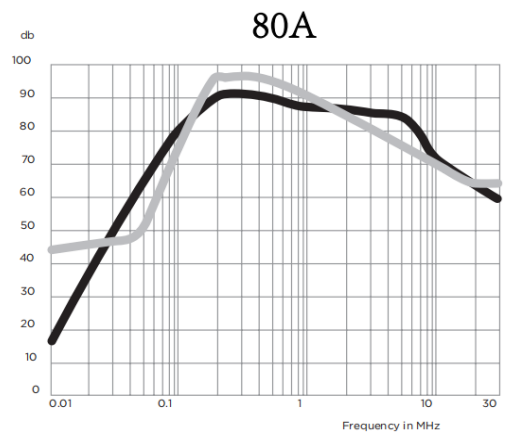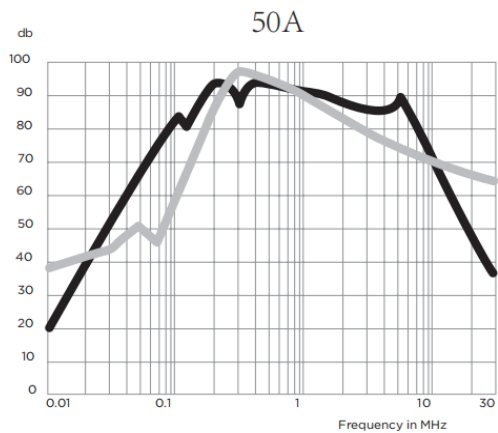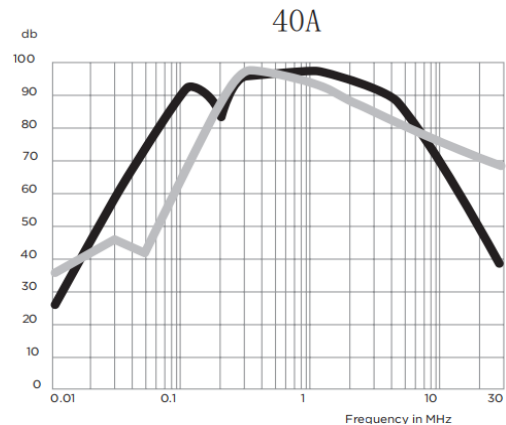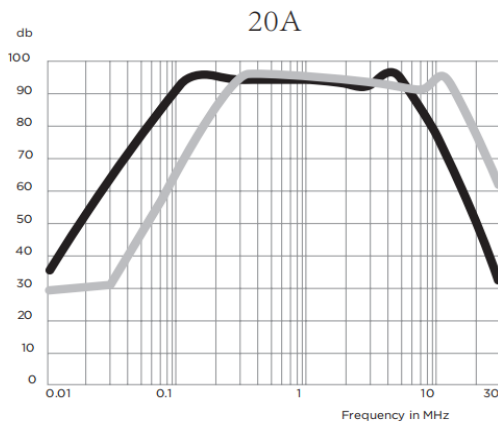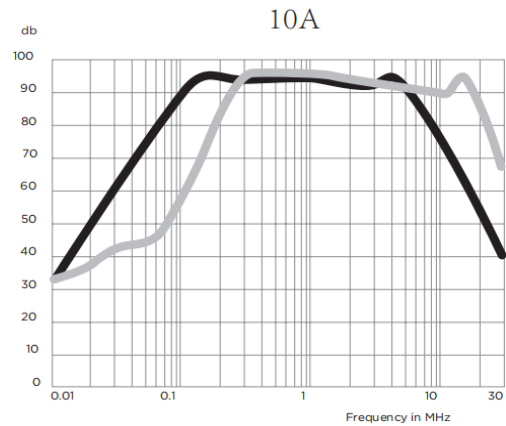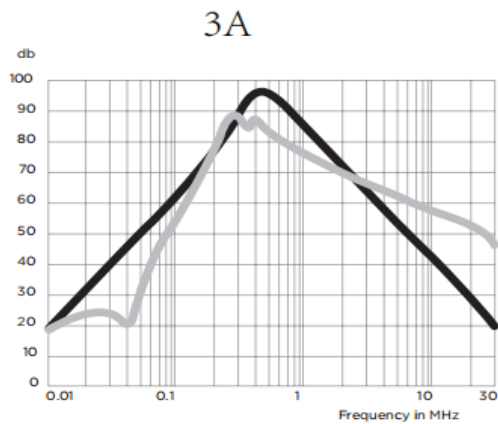

ZYH-4XA系列 : ZYH-4XA Series

性能参数


Performance Data

典型插入损耗

Typical Insertion Loss

在封闭的50欧姆系统中测量

Measured in closed 50 Ohm system

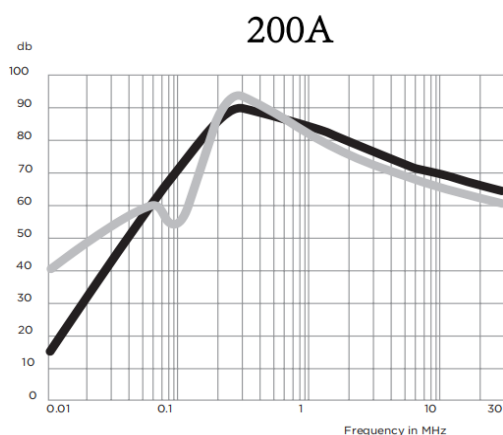

最小插入损耗 Minimum Insertion Loss

共模/不对称 (线对地)

Common Mode / Asymmetrical (Line to Ground)

current	Frequency — MHz							
Part No.	.01	.05	.1	.5	1	5	10	30
3A	18	28	40	68	79	62	65	48
10A	35	66	82	88	82	79	55	69
20A	39	68	83	93	88	68	45	69
40A	36	61	78	96	91	71	49	63
50A	39	68	83	93	88	68	45	04
80A	42	48	70	96	90	80	69	64
200A	37	50	80	89	85	80	70	60

差模/对称 (线对线)

Differential Mode / Symmetrical (Line to Line)

current	Frequency — MHz							
Part No.	.01	.05	.1	.5	1	5	10	30
3A	18	38	58	83	90	65	45	18
10A	26	58	88	94	96	92	69	38
20A	27	60	90	94	96	92	70	40
40A	27	58	88	96	98	92	68	38
50A	20	50	80	88	91	86	70	35
80A	18	49	80	89	88	87	71	58
200A	13	49	78	89	84	72	63	64